



# Frameless Shower Hinge

Part #C50-0004 C50-0005 C50-0006 C50-0010



## Product Specifications:

- Solid brass hinge for use on 3/8" (10mm) and 1/2" (12 mm) tempered safety glass
- Cutout required (see template on back for installation)
- Maximum door capacity with two hinges is 80 lbs; 3 hinges is 120 lbs
- Maximum glass width with two hinges is 28"; with three hinges is 32"
- Open / Close cycle of at least 50,000

## Gaskets:

- For 3/8" (10 mm) glass, use one thick gasket per side
- For 1/2" (10 mm) glass, use one thin gasket per side

We recommend only using tempered safety glass.

Do not use power tools to install these hinges.



**Call us toll free @ 800.325.7513**  
[www.morseindustries.com](http://www.morseindustries.com)



SEATTLE, WA

LOS ANGELES, CA


COLUMBIA, SC

WORKING SOLUTIONS IN RAILING, SHOWER & ARCHITECTURAL METALS  
CELEBRATING OVER 35 YEARS • SINCE 1982



# Frameless Shower Hinge

Part #C50-0004 C50-0005 C50-0006 C50-0010

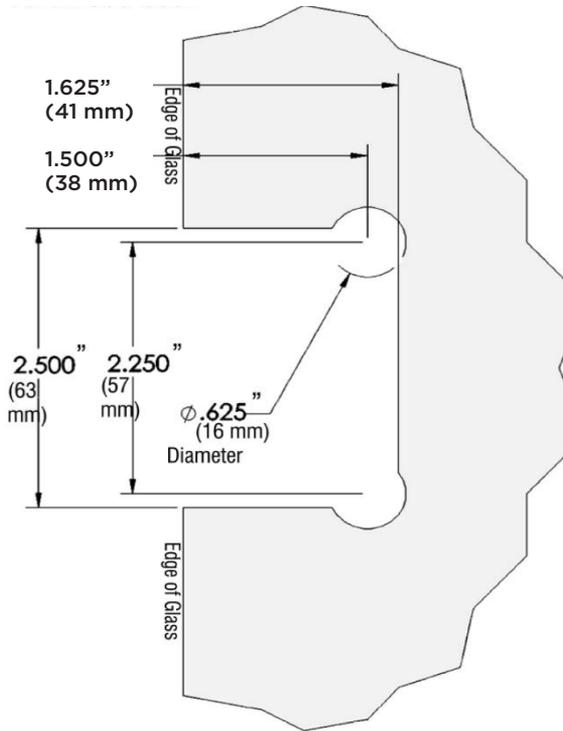

Call us toll free @ 800.325.7513

www.morseindustries.com



SEATTLE, WA

LOS ANGELES, CA

COLUMBIA, SC

WORKING SOLUTIONS IN RAILING, SHOWER & ARCHITECTURAL METALS  
CELEBRATING OVER 35 YEARS • SINCE 1982